




DIMENSIONS

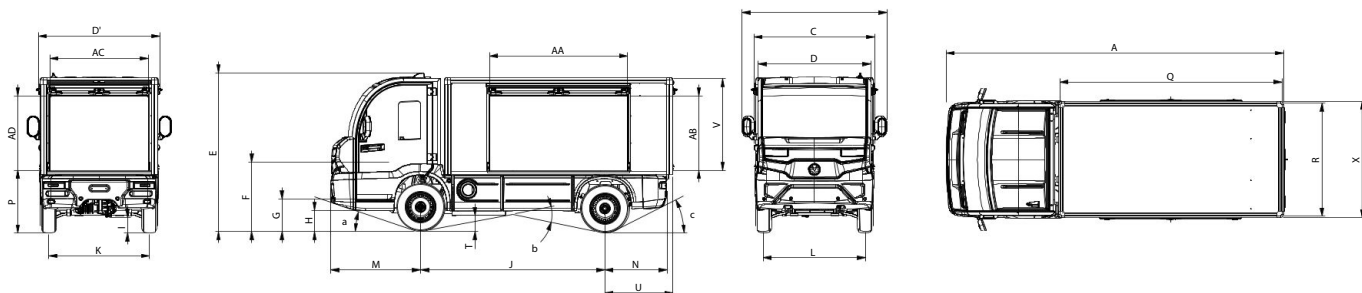

DIMENSIONS	A	B	C	D	D'	E	F	G	H	I	J	K	L	M	N	P	Q	R	T	U	V	X	AA	AB	AC	AD	a	b	c
mm	4,202	1,778	1,486	1,380	1,495	1,920	840	367	202	154	2,261	1,235	1,265	1,105	765	804	2,768	1,407	134	836	1,126	1,449	1,693	910	1,209	910	16°	19°	27°

TECHNICAL OVERVIEW

CHASSIS | CABIN

Homologation	N1
Maximum speed	70 km/h
External turning radius (kerb to kerb)	4,375 mm

G4+ BOX VAN WITH 2 SIDE SHUTTERS AND 1 REAR SHUTTER

Battery type	Lithium LiFePo4	
Battery capacity	20 kWh	30 kWh
Charging time Mode 2 (10A) Mode 3 (32A)	10 h 4 h	15 h 5 h
Maximum permissible mass	2,300 kg	2,300 kg
Mass in running order (MRO)	1,194 kg	1,239 kg
Payload capacity (passenger weight included 75 kg)	1,031 kg	986 kg
Tow load capacity for road approval trailers (without brakes)	597 kg	619 kg
Tow load capacity for road approval trailers (with brakes)	1,400 kg	1,400 kg

G4+ BOX VAN WITH 2 SIDE SHUTTERS AND 1 REAR SHUTTER - DIMENSIONS & FEATURES

Load length	2,768 mm
Load width	1,407 mm
Load height	1,126 mm
Weight of the equipment (van with 3 shutters)	249 kg
Loading area	3.9 m ²
Useful volume	4.38 m ³

Features

- Steel frame with anti-corrosion treatment and powder coating
- Removable non-slip wooden floor | 12 mm thick, rot-proof
- Walls and ceiling made of rot-proof wood (white polymerized lacquered surface) on aluminum structure

OPTIONS | TECHNICAL SPECIFICATIONS

Type of opening	Side shutter (right or left)	Rear shutter
Weight of the opening	25 kg	25 kg
Useful width	1,693 mm	1,209 mm
Useful height	926 mm	926 mm

Characteristics

- Aluminum slatted roller shutters
- Roller housing dimensions: 250 mm x 250 mm
- Lockable with key

