


DIMENSIONS

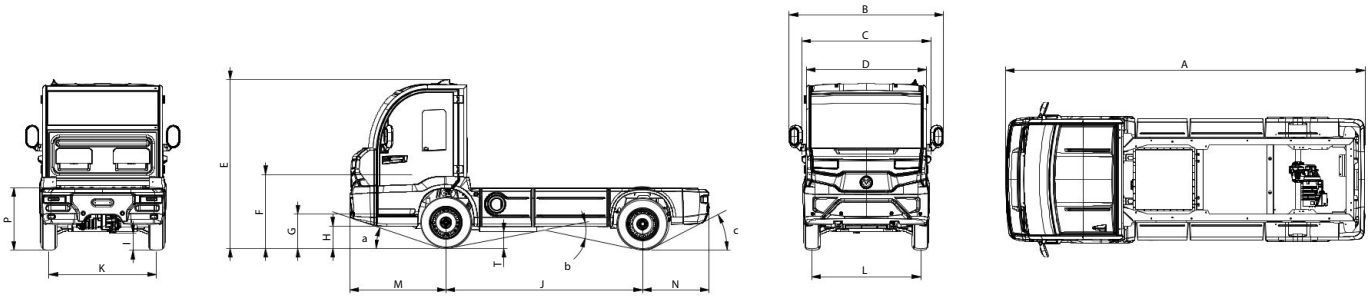

| DIMENSIONS | A | B | C | D | E | F | G | H | I | J | K | L | M | N | P | T | a | b | c |
|------------|-------|-------|-------|-------|-------|-----|-----|-----|-----|-------|-------|-------|-------|-----|-----|-----|-----|-----|-----|
| mm | 4,131 | 1,778 | 1,486 | 1,380 | 1,920 | 840 | 367 | 202 | 154 | 2,261 | 1,235 | 1,265 | 1,105 | 765 | 752 | 134 | 16° | 19° | 27° |

GENERAL FEATURES

| HOMOLOGATION SEATS | |
|---|---------------------|
| Homologation | N1 |
| Number of seats | 2 |
| PERFORMANCES | |
| Maximum speed | 70 km/h |
| Maximum gradient empty | 30 % |
| Maximum gradient loaded loaded with trailer | 20 % 12 % |
| MASSES | |
| Baseweight (rolling base + doors + towing hook bracket + battery bracket) | 675 kg |
| Maximum permissible mass | 2,300 kg |
| Maximum weight of the combination (GCW) | 3,700 kg |
| Tow load capacity for road approved trailers (with brakes) | 1,400 kg |
| Tow load capacity for road approved trailers (without brakes) | up to 750 kg |
| DIMENSIONS | |
| Maximum permissible length | 4,600 mm |
| Maximum permissible width | 1,560 mm |
| Maximum permissible height | 2,500 mm |
| Wheelbase | 2,261 mm |
| Front track Rear track | 1,265 mm 1,235 mm |
| Front overhang Rear overhang | 1,105 mm 765 mm |
| Front clearance angle | 16° |
| Turning radius wall to wall Kerb to kerb | 4,850 mm 4,375 mm |

SAFETY & DRIVER ASSISTANCE SYSTEMS

| BRAKES | |
|------------------------------------|--|
| Main brake type | Dual circuit in X |
| Front Rear brake discs | Ø 258 mm Ø 238 mm |
| Front Rear brake calipers | Ø 43 mm Ø 44,5 mm |
| Parking brake | Electric parking brake (manual and automatic activation) |
| Electric braking | With energy recovery |
| ADVANCED DRIVER ASSISTANCE SYSTEMS | |
| Anti-lock Braking System (ABS) | Standard |
| Electronic Stability Program (ESP) | Standard |
| Hill Start Assist (HSA) | Standard |
| Hydraulic Brake Assist | Standard |

OPTIONS & ACCESSORIES

| SIGNALLING PACK | WINTER PACK | OTHER |
|---|---|---|
| <ul style="list-style-type: none"> Reflective strips Class 2 Tri-flash warning triangle Safety kit (high-visibility vest & warning triangle) | <ul style="list-style-type: none"> Heated driver's seat Heated steering wheel | <ul style="list-style-type: none"> Air conditioning Keyless entry Tow hitch Flashing beacon Tri-flash warning triangle Side storage compartment |
| | | <ul style="list-style-type: none"> Transverse storage compartment Powder fire extinguisher Jack Charging cable (Mode 2 and/or Mode 3) |

TECHNICAL FEATURES

| TRANSMISSION | |
|--|--|
| Transmission type | Rigid axle and differential |
| Gear ratio | i = 12.5 |
| ELECTRIC POWERTRAIN | |
| Motor | Asynchronous AC |
| Max peak power (S2-5 mn) | 29.6 kW |
| Torque at max peak power (S2-5 mn) | 72 Nm |
| Nominal power (S2-30 minutes) | 17.0 kW |
| SUSPENSIONS & STEERING | |
| Suspension type - Front Rear | Pseudo MacPherson Composite leaf springs |
| Suspension travel - Front Rear | 125 mm 100 mm |
| Power steering | Variable-assist electric power steering |
| WHEELS AND TYRES | |
| Tyre type | Radial tubeless |
| Tyre size | 175/70R14 95T |
| Rim | 5J14 ET40 |
| Rim material | Stamped steel |
| Recommended pressure Summer tyres (standard) | F: 2.2 bar R: 2.2 bar |
| Maximum pressure Summer tyres (standard) | F: 3.0 bar R: 3.75 bar |
| Optional tyre fitments | All-season 3PMSF Winter 3PMSF |

BATTERIES & CHARGE

| LITHIUM LIFEPO4 | 20 kWh | 30 kWh |
|---|--------------|--------------|
| Voltage | 96 V | 96V |
| Battery weight | 195 kg | 240 kg |
| Charger | 6.6 kW | 6.6 kW |
| Charging time Mode 2 Mode 3 | 10 h 4 h | 15 h 5 h |
| Vehicle range (according to WLTP cycle) | up to 139 km | up to 180 km |

STANDARD EQUIPMENTS

- Wide-angle electric door mirrors
- Automatic headlights
- LED lighting
- Rear-view camera with front and rear parking sensors
- Pedestrian warning system (AVAS)
- Keyless start
- 7" multimedia display
- Bluetooth connectivity
- USB-A and USB-C charging ports
- 11.5 L under-seat storage compartment
- 3.2 L glovebox
- 3 kW heater