




DIMENSIONS

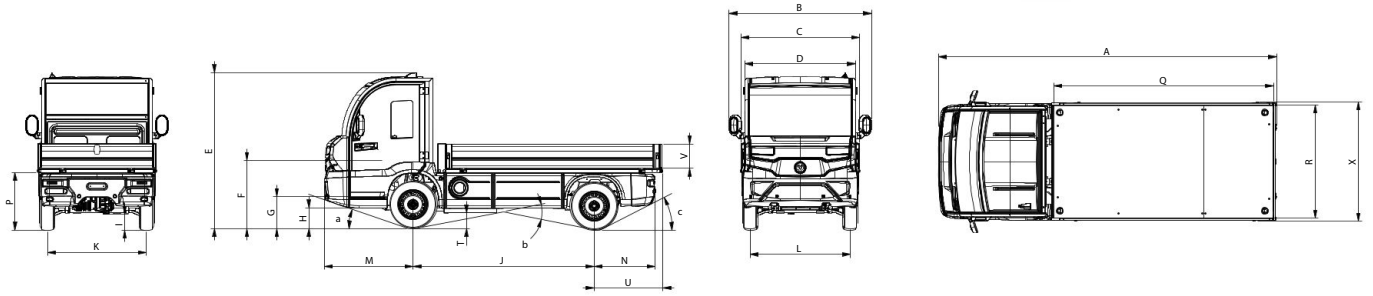

DIMENSIONS	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	T	U	V	X	a	b	c
mm	4,225	1,778	1,486	1,380	1,920	840	367	202	154	2,261	1,235	1,265	1,105	765	842	2,745	1,414	134	859	305	1,490	16°	19°	27°

TECHNICAL OVERVIEW

CHASSIS | CABIN

Homologation	N1
Maximum speed	70 km/h
External turning radius (kerb to kerb)	4,375 mm

G4+ PICK-UP

	Lithium LiFePo4	
	20 kWh	30 kWh
Battery type	Lithium LiFePo4	
Battery capacity	20 kWh	30 kWh
Charging time Mode 2 (10A) Mode 3 (32A)	10 h 4 h	15 h 5 h
Maximum permissible mass	2,300 kg	2,300 kg
Mass in running order (MRO)	1,049 kg	1,094 kg
Payload capacity (passenger weight included 75 kg)	1,176 kg	1,131 kg
Tow load capacity for road approval trailers (without brakes)	524 kg	547 kg
Tow load capacity for road approval trailers (with brakes)	1,400 kg	1,400 kg

G4+ PICK-UP DIMENSIONS & FEATURES

Load length	2,745 mm
Load width	1,414 mm
Load height	842 mm
Weight of the equipment	104 kg
Loading area	3.88 m ²
Features	<ul style="list-style-type: none"> • Steel platform frame • Removable wooden floor, 12 mm thick, anti-slip and rot-proof • Fold-down aluminum side and rear panels, removable without tools • 4 flush-mounted lashing rings

OPTIONS | TECHNICAL SPECIFICATIONS

	Mesh cage body	Solid cage body	Tarpaulin on cage body	Net on cage body
Weight	60 kg	59 kg	/	/
Height with option	1,100 mm	1,100 mm	1,100 mm	1,100 mm
Useful volume	4.3 m ³	4.3 m ³	4.5 m ³	4.3 m ³
Specifications	<ul style="list-style-type: none"> • Steel mesh extensions • Fixed front extension • Fold-down side mesh extensions, removable without tools • Locking on extension post end cap 	<ul style="list-style-type: none"> • Steel extension side structure with painted aluminum sheet • Fixed front extension side • Fold-down side extension panels, removable without tools • Locking on extension post end cap 	<ul style="list-style-type: none"> • PVC canvas • Colour white (RAL 9003) • Sloped roof fixed to a tubular frame 	<ul style="list-style-type: none"> • PPHR net 2.3 mm • Mesh size 20 mm