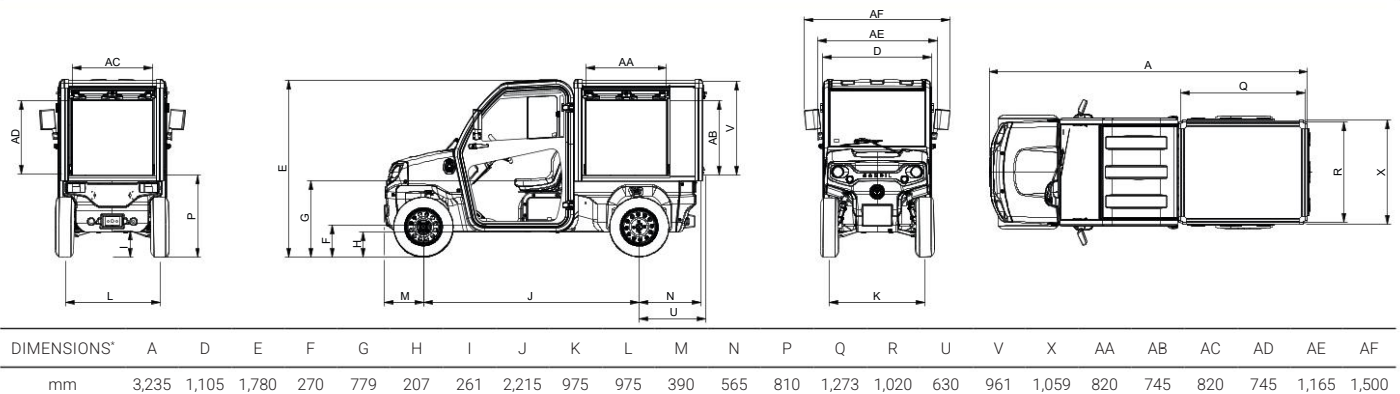


**DIMENSIONS****TECHNICAL OVERVIEW****CHASSIS | CABIN**

Homologation	L7e-CU
Maximum speed	30 km/h
External turning radius (kerb to kerb)	4,370 mm

TECHNICAL SPECIFICATIONS - Box van with 2 side shutters & 1 rear shutter

	OPEN LEAD ACID 4 X 12V SEMI TRACTION CELLS		LITHIUM NCM
Battery type	OPEN LEAD ACID 4 X 12V SEMI TRACTION CELLS		LITHIUM NCM
Battery capacity	5.8 kWh		7.5 kWh
Battery weight	164 kg		69 kg
Charging time on household socket	6h00		9h30
Maximum permissible mass	1,100 kg		1,100 kg
Actual vehicle mass (unladen mass** + battery + equipment + driver)	841 kg		746 kg
Payload capacity	259 kg		354 kg
Tow load capacity for road approval trailers (with & without brakes)	240 kg		240 kg

DIMENSIONS & FEATURES - Box van with 2 side shutters & 1 rear shutter

Load length	1,273 mm
Load width	1,020 mm
Load height	961 mm
Weight of the equipment (van with 3 shutters)	121 kg
Loading area	1.3 m²
Useful volume	1.25 m³
Features	• Steel frame with anti-corrosion treatment and powder coating • Removable non-slip wooden floor 12 mm thick, rot-proof • Walls and ceiling made of rot-proof wood (white polymerized lacquered surface) on aluminum structure

OPTIONS | TECHNICAL SPECIFICATIONS

	Side shutter (right or left)	Rear shutter
Type of opening		
Weight of the opening	20 kg	20 kg
Useful width	820 mm	820 mm
Useful height	745 mm	745 mm
Characteristics	• Aluminum slatted roller shutters • Roller housing dimensions: 250 mm x 250 mm • Lockable with key	

* All dimensions are given at GVW except for the height of the vehicle and the deck.
**The unladen mass includes standard doors and the tow hitch (without doors = -40 kg / with heavy duty doors = +7 kg). The actual masse does not include the 60 kg of optional equipment (L7e-CU).
Any information or other data provided in this document is non-binding and subject to modification at any time. June 2026

