




## DIMENSIONS

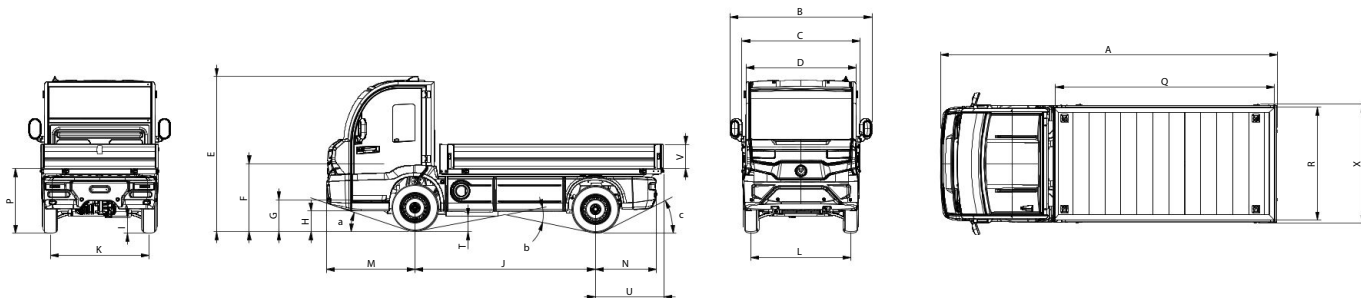

DIMENSIONS	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	T	U	V	X	a	b	c
mm	4,225	1,778	1,486	1,380	1,920	840	367	202	154	2,261	1,235	1,265	1,105	765	842	2,745	1,414	134	859	305	1,490	16°	19°	27°

## TECHNICAL OVERVIEW

### CHASSIS | CABINE

Homologation	N1
Maximum speed	70 km/h
External turning radius (kerb to kerb)	4,375 mm

### G4+ TIPPER

Battery type	Lithium LiFePo4	
Battery capacity	20 kWh	30 kWh
Charging time Mode 2 (10A)   Mode 3 (32A)	10 h   4 h	15 h   5 h
Maximum permissible mass	2,300 kg	2,300 kg
Mass in running order (MRO)	1,109 kg	1,154 kg
Payload capacity (passenger weight included   75 kg)	1,116 kg	1,071 kg
Tow load capacity for road approval trailers (without brakes)	554 kg	577 kg
Tow load capacity for road approval trailers (with brakes)	1,400 kg	1,400 kg

### G4+ TIPPER DIMENSIONS & FEATURES

Load length	2,745 mm
Load width	1,414 mm
Load height	842 mm
Weight of the equipment	164 kg
Loading area	3.88 m <sup>2</sup>
Maximum tipping angle	46°
Load bed lifting time	8.8 seconds

### Features

- Reinforced aluminum load bed
- 4 flush-mounted lashing rings
- Fold-down aluminum side and rear panels, removable without tools
- Load bed lifting control via wired remote control and cab-mounted overhead switch
- Telescopic hydraulic cylinder with safety check valve (anti-drop protection)
  - Cylinder rated for 1,000 kg evenly distributed load

## OPTIONS | TECHNICAL SPECIFICATIONS

	Mesh cage body	Solid cage body	Tarpaulin on cage body	Net on cage body
Weight	60 kg	59 kg	/	/
Height with option	1,100 mm	1,100 mm	1,100 mm	1,100 mm
Useful volume	4.3 m <sup>3</sup>	4.3 m <sup>3</sup>	4.5 m <sup>3</sup>	4.3 m <sup>3</sup>
Specifications	<ul style="list-style-type: none"> <li>• Steel mesh extensions</li> <li>• Fixed front extension</li> <li>• Fold-down side mesh extensions, removable without tools</li> <li>• Locking on extension post end cap</li> </ul>	<ul style="list-style-type: none"> <li>• Steel extension side structure with painted aluminum sheet</li> <li>• Fixed front extension side</li> <li>• Fold-down side extension panels, removable without tools</li> <li>• Locking on extension post end cap</li> </ul>	<ul style="list-style-type: none"> <li>• PVC canvas</li> <li>• Colour white (RAL 9003)</li> <li>• Sloped roof fixed to a tubular frame</li> </ul>	<ul style="list-style-type: none"> <li>• PPHR net   2.3 mm</li> <li>• Mesh size   20 mm</li> </ul>

